


PP Deadbolt Functions



4410 - Single Cylinder

Deadbolt thrown by rotating interior turn-piece or exterior key.




4420 - Double Cylinder

Deadbolt thrown by rotating interior or exterior key.

PP Series Solid Brass Deadbolt Specifications

Latches	Steel adjustable Round Corner standard (RCAL) 1" x 2-1/4", Square Corner (SCAL) and Drive-in (RFL) optional.
Strikes	Standard 1" X 2-1/4" RCS & Full Lip 2-1/4" RCS. Others available (See parts page 24)
Cylinder	Solid Brass 5 pin plug, with KW1 keyway.
Door Prep	1" Edge Bore, 1" x 2-1/4" Latch mortise, 2-1/8" cross bore on face of door.
Door Thickness	Designed for 1-3/4" doors. Minimum 1-11/16", maximum 1-7/8" door thickness.
Handing	All EP-Series deadbolts are non-handed operation.
U.L.	Available U.L. latch (PT-ULKT04). Allows any EP deadbolt to meet 20 minute, 45 minute, or 90 minute requirements.

PP Series Solid Brass Deadbolt Dimensions

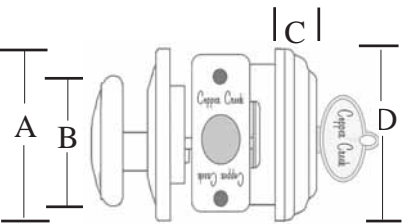	A	B	C	D	
	4410	2-9/16"	1-15/16"	15/16"	2-9/16"
	4420	2-9/16"	n/a	15/16"	2-9/16"