




Copper Creek Hardware M-Series ANSI/BHMA Grade-3 Standard Duty Residential Knob Specifications

**GK1000 Series
Gale Style**



Available
UL LISTED

	A	B	C
Gale	2-3/16"	2-9/16"	2-9/16"

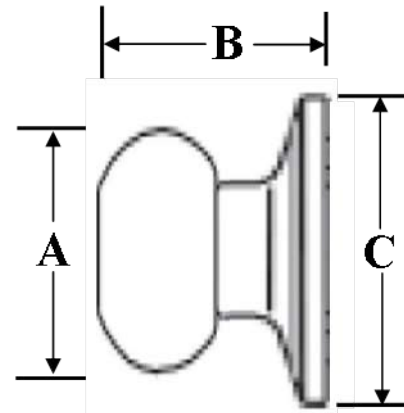

Knob Specifications & Options	
ANSI / BHMA	ANSI 156.2 Grade-3.
Rose Diameter	2-9/16".
Cylinder	5 pin KW1 std.
Keying	As specified: Available Master keyed, Builder keyed, KD, KA.
Latch	2-3/8" backset, 1" round corner narrow faceplate std. 2-3/4" or drive-in optional.
Strike	PT-LS06: 2-3/4" full lip round corner Strike std.
Door Prep	1" edge bore, 1"x 2-1/4" latch mortise, 2-1/8" cross bore, 2-3/8" backset standard, 2-3/4" optional.
Door Thickness	Min 1-3/8", Max 1-3/4".
Handing	1000 Series Gale knobs are non-handed.
U.L. Labeled	1020 & 1040 functions meet 20 minute U.L. rating with U.L. Latch.
Warranty	25 year mechanical, 5 year finish.

Std. Finish	Special Order Finishes					Case Qty	Case Size
SS	<i>TB</i>	<i>AB</i>	<i>AN</i>	<i>PB</i>	<i>PS</i>	Units	LxWxH
x	<i>x</i>	<i>x</i>	<i>x</i>	<i>x</i>	<i>x</i>	24	18x14x10

Function	Operation
1020 Passage	Both knobs always free turning. No locking operation.
1030 Privacy	Inside turn-button locks and unlocks both knobs. Knob can be unlocked by rotating the outside privacy mechanism.
1040 Entry	Outside key or inside turn-button locks both knobs.
1090 Dummy	1/2 Dummy - Used as pull or decorative trim only.