




Bulldog Commercial Hardware 6400 Series ANSI/BHMA Grade-2 Heavy Duty Commercial Deadbolt Specifications








Meets ADA
Regulations

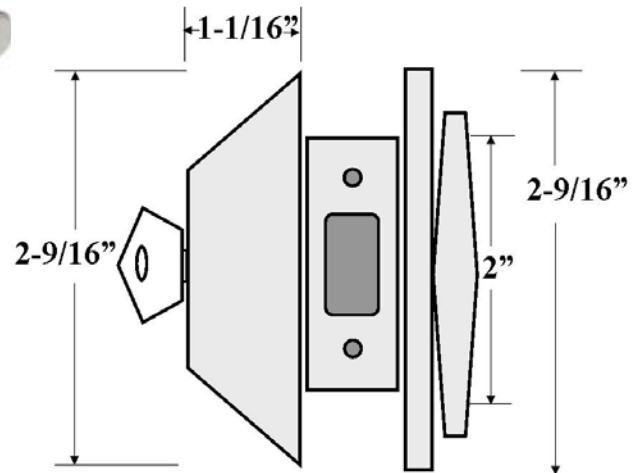

UL LISTED



Stocking Finish		Special Order Finishes			Case Qty	Case Wt	Case Size
SS	10B	AB	PB	PS	Units	LBS	LxWxH
x	x	x	x	x	12	24	15x9x12

Deadbolt Specifications & Options		Deadbolt Strike Options	
ANSI / BHMA	ANSI 156.2 Grade-2.		PT-DS34FL 3-5/8" x 1-1/4".
Turn Piece Diameter	2-1/2".		PT-DS34 3-5/8" x 1-1/4"
Cylinder	6 pin C std.- 6 pin KW1 optional .		PT-DS02-4H 2-3/4" x 1-1/8"
Keying	As specified: Available Master keyed, Builder keyed, KD, KA.		PT-DS06-4H 2-3/4" x 1-1/8"
Free Spinning Guard Cover	Standard.		PT-STBP-4H 2-3/4" x 1-1/8" Strike Reinforcing Plate. Std with DS02-4H and DS06-4H Strikes.
Anti-Pry Shield	Standard.		
Latch	2-3/4" backset, 2-3/8" optional. 1-1/8" square corner wide faceplate std.		
Strike	PT-DS06-4H 2-3/4" Strike with PT-ST-BP-4H steel reinforcing plate std.		
Door Prep	1" edge bore, 1" or 1-1/8" x 2-1/4" latch mortise, 2-1/8" cross bore, 2-3/4" backset standard, 2-3/8" optional.		
Door Thickness	Min 1-3/8", Max 1-3/4".		
Handing	All,6400 Deadbolts are non-handed.		
U.L.	3 hour, U.L. Labeled Fire Rated.		